


Geberit exposed cistern AP123, stop-and-go flush, for remote flush actuation



Example image

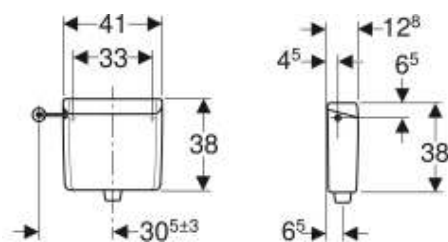

Application purposes

- For low level installation
- For bathroom furniture or for installation behind the wall
- For thin walls of max. 70 mm thickness in combination with floor-standing WCs
- For flush actuations with pneumatic remote flush actuation

Characteristics

- Low-noise
- Single flush

- Can be refitted for pneumatic flush actuation
- Insulated against condensation
- Cistern lid without actuator button
- Flush pipe connection, pluggable
- Water supply connection on the left/right

Technical data

Flush volume, factory setting	6 l
Flush volume, adjustment range	6 / 9 l
Product material	ABS

Scope of delivery

- Flush bend 90° made of PE-HD, ø 50 / 44 mm, 38 x 5.2 cm
- Fastening material

To order additionally

- Water supply connection set
- Flush bend extension, ø 45 mm
- Pneumatic actuator
- Pneumatic flushing device

Art. no.	Colour / surface	B	H	T
123.136.11.1	white alpine	41 cm	38 cm	12.5 cm